

# No Skidding®



266 Wildcat Rd, Toronto, ON M3J 2N5 Canada  
Phone: (416) 667-1788 Fax: (416) 667-1783  
sales@noskidding.com www.noskidding.com  
or call us Toll Free at 1-800-375-0571

We warehouse within the U.S. for our U.S. customers

# NS5100 SERIES

## SLIP RESISTANT SAFETY TAPE

### WITH ALUMINUM OXIDE GRIT

## NS5100 Series, Black, Clear & Colors

### Slip Resistant Safety Tape

NS5100 Series Safety Tape is a hard wearing product designed for application in commerce and industry. The contact adhesive has excellent bonding to clean, sound surfaces with good instant grip.

Recommended for high traffic areas where wet or slippery floors may expose the user to slip injury.

Consist of a hard wearing aluminum oxide grit profile, bonded to a tough substrate. The surface of the tape is resistant to water, grease, detergents and oils.

Simple, quick application. Self adhesive, just peel off the protective backing and place into position with firm pressure.

### Recommended Uses:

- Stairs & Ladders
- Factories & Repair Facilities
- Commercial Kitchens
- Service Stations
- Loading Docks & Ramps
- Truck Beds & Steps
- Machine Shops & Shipping Areas
- Warehouses & Recreational Areas


Also available in a wide range of colors and stripes. Use Color solids and stripes to clearly identify various pathways and/or hazardous areas requiring anti-slip tape. Call for pricing and availability.

**Solids:** Available in colors including, black and clear.

**Diagonal Stripes:** Available in Black/Yellow and Red/White.

**Cleats:** Available in Black.

**Size:** 3/4" x 24", 5 1/2" x 5 1/2", 6" x 24". Can customize cleat sizes per your specifications.

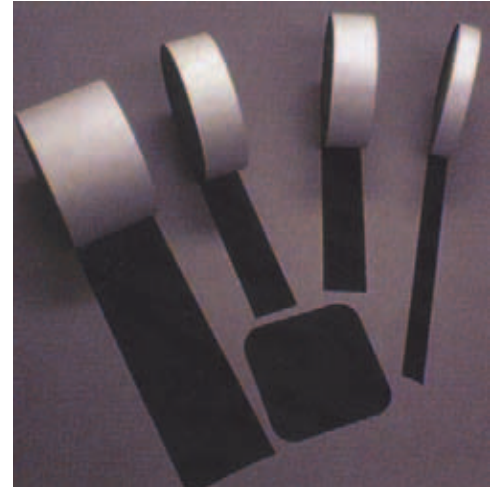

Name	Size
NS-5101	1"x60'
NS-5102	2"x60'
NS-5103	3"x60'
NS-5104	4"x60'
NS-5106	6"x60'
NS-5112	12"x60'
NS-5118	18"x60'
NS-5124	24"x60'
NS-5136	36"x60'
NS-5142	42"x60'

### Please Specify Color.

O-Orange	B-Black
GN-Green	C-Clear
GR-Grey	W-White
LB-Light Blue	Y-Yellow
YB-Yellow/Black	BU-Dark Blue
WR-White/Red	BR-Brown
R-Red	



NS5100B Black Grit



## Technical Specifications NS5100 Anti Slip Tape

### Coefficient of Friction

- Static Coefficient of Friction on wet surface: Exceeds O.S.H.A Requirements
- Static Coefficient of Friction on dry surface: Exceeds O.S.H.A Requirements
- OSHA Spec 1910.24 Stair Tread
- OSHA Spec 1910.26 Ladder Rungs
- Military Spec Mil-D-17951E-Ships
- Military Spec Mil-W-5044C-Type IV
- Motor Vehicle Safety Standard #302

### General Properties

- **Flexure:** Bends over sharp 90-degree angles without fracture; after application to substrate, resists repeated bending without cracking or failure of bond.
- **Temperature Requirements:** Apply to surface when surface temperature is 50°F (10°C) or higher.
- **Steam Cleaning:** Applied product will tolerate steam cleaning.
- **Environmental Resistance:** Product is essentially unaffected by normal climactic exposure and mild acid or alkalis exposure under normal conditions.

### Application Instructions


- Testing of adhesion to surface should be done before installation. Fill in cracks, seal porous surfaces and repair to a smooth finish, as required, avoid application to grout areas.
- Always apply No Skidding® Safety Tape to clean, dry, wax and oil free surface. Allow ample time for drying.
- Peel off protective release paper from No Skidding® Safety Tape.
- Press No Skidding® Safety Tape to prepared surface. Bond is increased by using a rubber hand roller.
- No Skidding® Safety Tape is ready for immediate use, no need to wait.
- Keep No Skidding® Safety Tape clean. Use mild floor cleaners as directed.
- Please read detailed instructions for use before installing.

**Important:** Seller's and manufacturers only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for the intended use, and the user assumes all risk and liability whatsoever in connection therewith. No statement of recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of the seller and manufacturer. Buyer assumes all risk and liability associated with disposal.

No Skidding® products are in use around the world in hotels, warehouses, factories, shopping malls, public transit systems, airports, hospitals and senior care, office complexes, restaurants, day care, schools, fitness clubs, government and military facilities.

**The most complete range of slip injury prevention products in the World.**

**Available in Black,  
Clear, White, Colors  
& Diagonal Stripes**

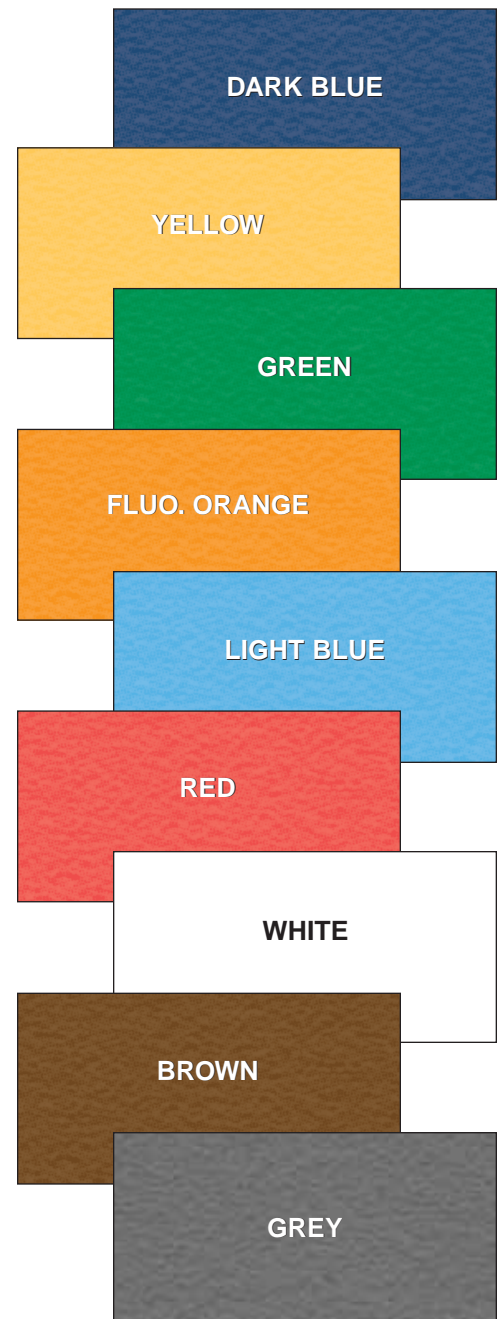

**Also available in Clear Grit.**

**No Skidding®**   
**www.noskidding.com**

266 Wildcat Rd, Toronto, ON M3J 2N5 Canada  
Phone: (416) 667-1788 Fax: (416) 667-1783  
sales@noskidding.com www.noskidding.com  
or call us Toll Free at 1-800-375-0571

**We warehouse within the U.S. for our U.S. customers**

\* No Skidding® is a registered trademark of No Skidding Products, Inc., Toronto Canada

**E.&O.E.**